



KELVIN (CCT):

- 3000K** 830
- 4000K** 840
- 5000K** 850

ORDERING INFORMATION:

PART NUMBER	DESCRIPTION	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FLED16A21OMNI830/G8	LED 16W OMNI DIRECTIONAL A21 3000K	60	450 x 375 x 295mm - 17.7 x 14.8 x 11.6"	8.71 kg
FLED16A21OMNI840/G8	LED 16W OMNI DIRECTIONAL A21 4000K	60	450 x 375 x 295mm - 17.7 x 14.8 x 11.6"	8.71 kg
FLED16A21OMNI850/G8	LED 16W OMNI DIRECTIONAL A21 5000K	60	450 x 375 x 295mm - 17.7 x 14.8 x 11.6"	8.71 kg

OPERATING SPECIFICATIONS:

PART NUMBER	WATTS	LUMENS	EFFICACY (LM/W)	CCT	CRI	DIMMABLE	RATED LIFE	WARRANTY
FLED16A21OMNI830/G8	16	1600	100	3000K	80	YES	25,000 hrs	3 Years
FLED16A21OMNI840/G8	16	1600	100	4000K	80	YES	25,000 hrs	3 Years
FLED16A21OMNI850/G8	16	1600	100	5000K	80	YES	25,000 hrs	3 Years

PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

FLED16A21OMNI8/G8**

LED 16W OMNI Directional A21

Fusion FLED A21 lamps are designed for high performance and offer an incredibly long life expectancy, high efficacy, and easy integration within your existing light fixtures making for a simple and cost effective switch.

FEATURES & BENEFITS:

- Long life - 25,000Hr
- Dimmable to 5% for design flexibility
- Contains no mercury or lead
- Damp location rated
- ENERGY STAR certified
- OMNI Directional Design
- White frost A19 shape envelope with no visible diodes
- Replaces 100w incandescent

APPLICATIONS:

- Offices, Schools and Commercial Buildings
- Malls and Retail Stores
- Hotels and Leisure
- Sports and Recreational Facilities
- Home and Cottage

APPROVALS





PART NUMBER:

FLED16A210MNI8/G8**


LED 16W OMNI Directional A21

ELECTRICAL SPECIFICATIONS:

PART NUMBER	LAMP WATTS	LAMP OPERATING VOLTAGE	LAMP OPERATING CURRENT(mA)	OPERATING FREQUENCY	POWER FACTOR
FLED16A210MNI8**/G8	16	120V	135	50/60Hz	0.9

PHYSICAL SPECIFICATIONS:

PART NUMBER	LAMP STYLE	BULB FINISH	BASE	MAX OVERALL LENGTH (MOL)	MAX OVERALL DIA. (MOD)	WEIGHT	OPERATING TEMP.	STORAGE TEMP.	LED TYPE	BEAM ANGLE
FLED16A210MNI8**/G8	A21	LED	E26	131(mm)	70 (mm)	95	-20f45	-40f65	SDM	230

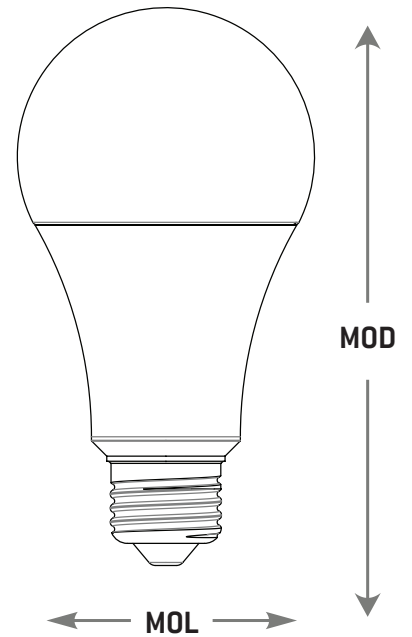

RoHS COMPLIANT



LED

FC

