


PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

# FB232MVE-LHE


## 32W 2L T8 Electronic High Efficiency Fluorescent Ballast

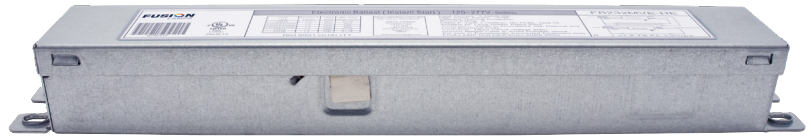


Fusion T8 Electronic Fluorescent Ballasts are designed to perform to the highest standards and conform to and meet all applicable ANSI, FCC, UL & CSA requirements. They provide energy efficient fluorescent system solutions for numerous applications and for use in various fixture designs including recessed and surface mounted as well as specialty fixtures. Fusion electronic ballasts have a limited warranty providing peace of mind for the user.

**WIRING DIAGRAMS:**

**1 Lamp:**

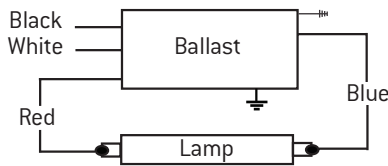

**2 Lamp:**

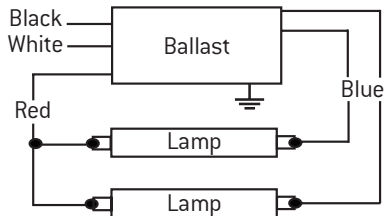

**FEATURES & BENEFITS:**

- 35W 2 Lamp T8 LPF High Efficiency E-Ballast
- Parallel lamp connection
- 120-277V Multi-Voltage
- Instant Start
- Programmed Rapid Start
- Sound Rating: A
- Low Power Factor
- High Efficiency

**APPROVALS**



**DIMENSIONS:**

Length: 9.50" Width: 1.72" Height: 1.18" Mounting: 8.90"

**ORDERING INFORMATION:**

PART NUMBER	DESCRIPTION	UNIT QTY	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FB232MVE-LHE	Fusion 2L T8 Instant Start Electronic Fluorescent Ballast	1	10	380 x 265 x 95 mm - 14.96 x 10.43 x 3.74 in	4.6kg - 10.14lbs

**PERFORMANCE SPECIFICATIONS:**

PART NUMBER	STARTING METHOD	LAMP CONNECTION TYPE	INPUT VOLTAGE	INPUT FREQUENCY	SOUND RATING	REMOTE MOUNTING DISTANCE
FB232MVE-LHE	Instant Start	Parallel	120-277 VAC	50/60Hz	A	18ft Max.



PART NUMBER:

# FB232MVE-LHE

32W 2L T8 Electronic Fluorescent Ballast

ELECTRICAL SPECIFICATIONS:

LAMP TYPE	# OF LAMPS	LAMP WATTS	MIN. START TEMP	INPUT CURRENT (Amps)	INPUT WATTS	MAX. THD%	POWER FACTOR	MAX. LCCF	BALLAST FACTOR	BEF
F32T8	1	32	-18°C/ 0°F	0.25	30	10	0.99	1.60	0.97	3.20
	2			0.42	50				0.78	1.57
F32T8/ES (30W)	1	30	16°C/ 60°F	0.24	29				0.97	3.40
	2			0.39	47				0.78	1.68
F32T8/ES (28W)	1	28		0.23	27				0.97	3.63
	2			0.36	43				0.78	1.83
F32T8/ES (25W)	1	25		0.22	26				0.97	3.79
	2			0.35	41				0.78	1.91
F25T8	1	25	-18°C/ 0°F	0.21	24				0.99	4.06
	2			0.34	40				0.81	2.03
F17T8	1	17		0.15	18				1.01	5.58
	2			0.24	29				0.83	2.87

ELECTRONIC FLU BALLASTS

