



KELVIN (CCT):

- 3000K** 830
- 3500K** 835
- 4000K** 840

ORDERING INFORMATION:

PART NUMBER	DESCRIPTION	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FLED11HPL830/4P	LED 11W Horizontal PL 4 Pin 3000K	50	795*240*100mm (31.3*9.4*3.9")	5.8 kg (12.8 lb)
FLED11HPL835/4P	LED 11W Horizontal PL 4 Pin 3500K	50	795*240*100mm (31.3*9.4*3.9")	5.8 kg (12.8 lb)
FLED11HPL840/4P	LED 11W Horizontal PL 4 Pin 4000K	50	795*240*100mm (31.3*9.4*3.9")	5.8 kg (12.8 lb)

OPERATING SPECIFICATIONS:

PART NUMBER	LAMP WATTS	LUMENS	EFFICACY	CCT	CRI	CERT 1	CERT 2	DIMMABLE	RATED LIFE	WARRANTY
FLED11HPL830/4P	11W	800 lm	72.7 lm/W	3000K	83	cULus	DLC	NO	50,000 hrs	5 Years
FLED11HPL835/4P	11W	800 lm	72.7 lm/W	3500K	83	cULus	DLC	NO	50,000 hrs	5 Years
FLED11HPL840/4P	11W	850 lm	77.3 lm/W	4000K	83	cULus	DLC	NO	50,000 hrs	5 Years

PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

FLED11HPL8**/4P

LED 11W Horizontal PL 4 Pin

Fusion's lamps are designed to perform and offer exceptional life, high efficacy, and easy integration within your existing lighting fixtures, making it a simple and cost effective switch. Make your space more energy efficient using Fusion's impressive line of Energy Star qualified LED lamps; brighten your spaces with accented and focused light, whilst saving money. Bring your space into the 21st century, and light your commercial or residential space with Fusion LED Lamps.

FEATURES & BENEFITS:

- Long Life - reduces replacement and labour costs
- 5 year warranty †
- CRI of 83+
- G24Q Base
- Minimum starting temp. -20°C
- Contains no mercury or lead
- Up to 50,000 hour life
- Exceptional thermal management for minimal lumen depreciation

APPLICATIONS:

- Offices - Ambient Lighting, Task Lighting
- Retail Stores - Ambient Lighting,
- Showcase Lighting, Accent Lighting
- Restaurants - Accent Lighting, Ambient Lighting, Atmosphere Creation
- Hotels - Accent Lighting, Ambient Lighting
- Recreational Facilities - Accent lighting, Ambient Lighting
- Residential - Home, Cottage, Accent Lighting


APPROVALS



ELECTRICAL SPECIFICATIONS:

PART NUMBER	LAMP WATTS	LAMP OPERATING VOLTAGE	LAMP OPERATING CURRENT(mA)	OPERATING FREQUENCY	POWER FACTOR
FLED11HPL830/4P	11W	120-277VAC	102 mA	50/60 Hz	0.87
FLED11HPL835/4P	11W	120-277VAC	102 mA	50/60 Hz	0.87
FLED11HPL840/4P	11W	120-277VAC	102 mA	50/60 Hz	0.87

LUMINANCE DISTRIBUTION CHART:

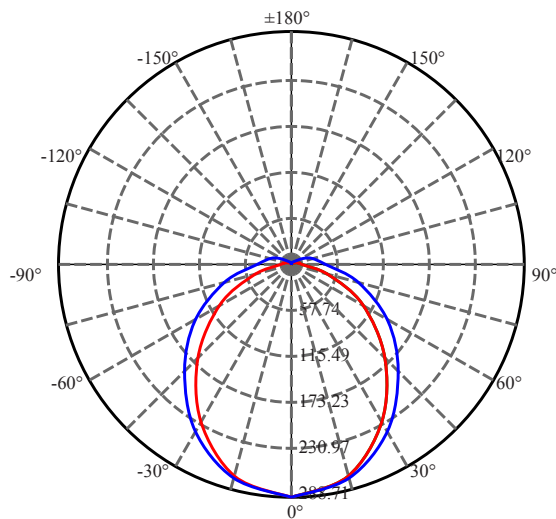

C0(Max): —
 C0/C180: —
 C90/C270: —

Beam Angle(50%Imax):C0/180Left:49.6 Right:49.6
 :C90/270Left:58.1 Right:58.1

PHYSICAL SPECIFICATIONS:

PART NUMBER	LAMP STYLE	BULB FINISH	BASE	MAX OVERALL LENGTH (MOL)	MAX OVERALL DIA. (MOD)	WEIGHT	OPERATING TEMP.	STORAGE TEMP.	BEAM ANGLE
FLED11HPL830/4P	PL	LED	G24Q	132mm - 5.2"	41mm - 1.6"	0.1 kg - 0.22 oz	-20°C / 45°C	-20°C / 65°C	99.2°
FLED11HPL835/4P	PL	LED	G24Q	132mm - 5.2"	41mm - 1.6"	0.1 kg - 0.22 oz	-20°C / 45°C	-20°C / 65°C	99.2°
FLED11HPL840/4P	PL	LED	G24Q	132mm - 5.2"	41mm - 1.6"	0.1 kg - 0.22 oz	-20°C / 45°C	-20°C / 65°C	99.2°

