

PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

FLED15PAR38FLD8**/G4

LED 15W PAR38 FLOOD



FUSION's LED PAR16, PAR20 & PAR38, MR16, BR30 & A19 lamps are designed to perform and offer exceptional life, high efficacy, and easy integration within your existing lighting fixtures, making it a simple and cost effective switch. Make your space more energy efficient using Fusion's impressive line of Energy Star qualified LED lamps; brighten your spaces with accented and focussed light, whilst saving money. Bring your space into the 21st century, and light your commercial or residential space with Fusion LED Lamps.

FEATURES & BENEFITS:

- Energy Star Approved & Listed
- 5 Year Warranty
- > 25,000 Hour Long Life Equates To Lower Maintenance Costs
- State of Art Technology
- Design Style
- Industry Standard Lamp Bases
- Dimmable to 5%
- Contains No Mercury or Lead
- Creates Punch & Pizzazz and Visually Appealing Aesthetics
- Targeted And Controlled Light For Better Design
- Low Energy Usage Equates To Benefits For The Environment
- Exceptional Heat Control As A result Of Fusion LED Technology
- Wet Location Rated

APPLICATIONS:

- Offices - Ambient Lighting, Task Lighting, etc.
- Retail Stores - Ambient Lighting, Showcase Lighting, etc.
- Restaurants - Accent Lighting, Ambient Lighting, atmosphere creation, etc.
- Hotels - Accent Lighting, Ambient Lighting, etc.
- Recreational Facilities - Accent lighting, Ambient Lighting, etc.

APPROVALS



KELVIN (CCT):

- 2700K 827
- 3000K 830
- 4000K 840

AVAILABLE TYPES:

- 6W PAR16
- 7W PAR20
- 10W PAR30
- 15W PAR38
- 17W PAR38
- 6W MR16
- 7W MR16
- 7W A19
- 9.5W A19

ORDERING INFORMATION:

PART NUMBER	DESCRIPTION	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FLED15PAR38FLD827/G4	Fusion LED 15W PAR38 Flood 2700K	6	416 x 283 x 190mm / 16.4 x 11.1 x 7.5"	3.6 KG / 8.0 LB
FLED15PAR38FLD830/G4	Fusion LED 15W PAR38 Flood 3000K	6	417 x 283 x 190mm / 16.4 x 11.1 x 7.5"	3.6 KG / 8.0 LB
FLED15PAR38FLD840/G4	Fusion LED 15W PAR38 Flood 4000K	6	418 x 283 x 190mm / 16.4 x 11.1 x 7.5"	3.6 KG / 8.0 LB


OPERATING SPECIFICATIONS:

PART NUMBER	LAMP WATTS	LUMENS	EFFICACY (LPW)	CCT	CRI	CERT1	CERT2	DIMMABLE	RATED LIFE	WARRANTY
FLED15PAR38FLD827/G4	15W	950 lm	63.3	2700K	90	cULus	EnergyStar	YES	25,000 hrs	5 Years
FLED15PAR38FLD830/G4	15W	1000 lm	66.7	3000K	90	cULus	EnergyStar	YES	25,000 hrs	5 Years
FLED15PAR38FLD840/G4	15W	1020 lm	68	4000K	90	cULus	EnergyStar	YES	25,000 hrs	5 Years


ELECTRICAL SPECIFICATIONS:

PART NUMBER	LAMP WATTS	LAMP OPERATING VOLTAGE	LAMP OPERATING CURRENT (mA)	OPERATING FREQUENCY	POWER FACTOR	DRIVER	MAX THD%
FLED15PAR38FLD827/G4	15W +10%	120VAC +10%	136	60 Hz	> 0.9	Integral	30.40
FLED15PAR38FLD830/G4	15W +10%	120VAC +10%	136	60 Hz	> 0.9	Integral	30.40
FLED15PAR38FLD840/G4	15W +10%	120VAC +10%	136	60 Hz	> 0.9	Integral	30.40


SPECTRAL POWER DISTRIBUTION - 2700K (827)

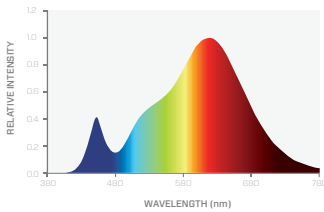


SPECTRAL POWER DISTRIBUTION - 3000K (830)

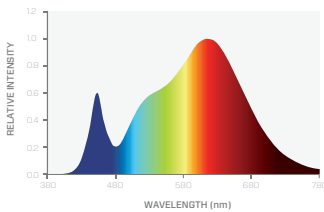

SPECTRAL POWER DISTRIBUTION - 4000K (840)




LUMINANCE DISTRIBUTION DIAGRAM

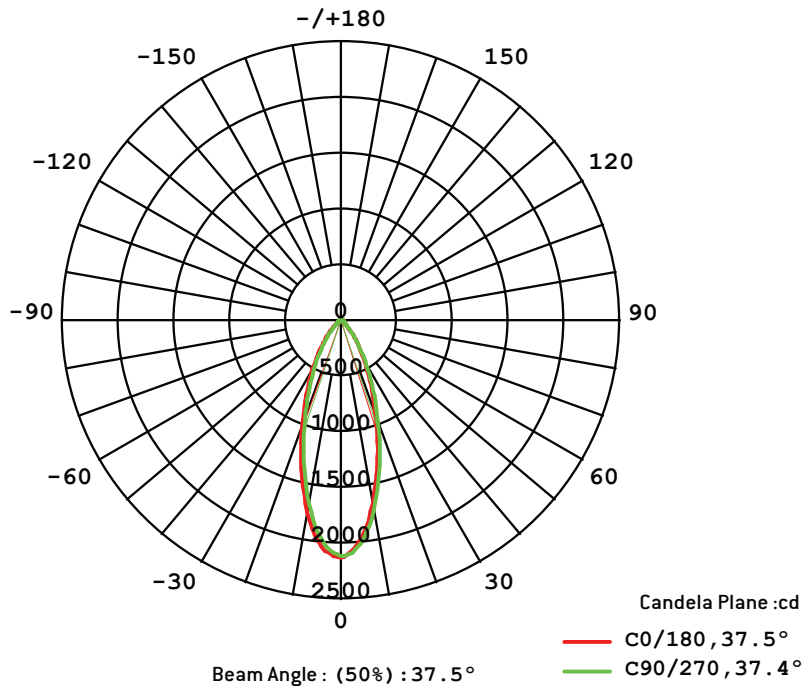

PHYSICAL SPECIFICATIONS:

PART NUMBER	LAMP STYLE	BASE	MAX. OVERALL LENGTH (MOL)	MAX. OVERALL DIAMETER (MOD)
FLED15PAR38FLD/G4	PAR38	E26	5.1" [129mm]	4.7" [120mm]

WEIGHT	OPERATING TEMP.	STORAGE TEMP.
430g / 15.2oz	-40°C - +40°C	-40°C - +40°C



* NOTE: Physical specifications are the same for all colour temperatures

