

PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

FB232347E-PPS-HE


32W 2L T8 Electronic Fluorescent Ballast




Fusion Electronic Fluorescent Ballasts are designed to perform to meet all applicable ANSI, FCC, UL & CSA requirements. Used in various fixture types Fusion ballasts are energy efficient and carry a 5 year limited warranty.

WIRING DIAGRAM:

1 Lamp:



2 Lamp:

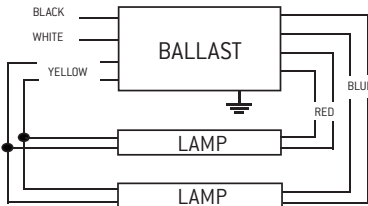

FEATURES & BENEFITS:

- Programmed Start
- 347V input voltage
- Industry standard small ballast housings
- Lamp end-of-life protection circuitry
- 5 Year Warranty
- RoHS Compliant
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI/RFI (non-consumer limits)
- cULus Listed (Class P, Type 1 Outdoor, Type HL)

APPLICATIONS:

- **Retail:** Malls, Shopping Centres, Stores, etc.
- **Hospitality:** Restaurants, Hotels, etc.
- **Commercial:** Offices, Show Rooms & Display Areas
- **Education Centres:** Universities, Colleges, Schools, etc.

APPROVALS

RoHS
COMPLIANT

UL
LISTED

FC

ANSI CODE **C82.11**

ANSI CODE **C62.41**

ORDERING INFORMATION:

PART NUMBER	DESCRIPTION	UNIT QTY	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FB232347E-PPS-HE	Fusion 32W 2 Lamp Electronic Fluorescent Ballast	1	20	13.78" x 10.24" x 3.35" - 350 x 260 x 85 mm	28.6 lbs - 12.9 kgs

PERFORMANCE SPECIFICATIONS:

PART NUMBER	STARTING METHOD	LAMP CONNECTION TYPE	INPUT VOLTAGE	INPUT FREQUENCY	SOUND RATING	REMOTE MOUNTING DISTANCE
FB232347E-PPS-HE	Programmed Start	Parallel	347 VAC	50/60Hz	A	18ft Max.